

SECTION 0 - GENERAL

0.0 Flight Manual Approval

KAVANAGH BALLOONS PTY LIMITED

**KAVANAGH
EX-65
HOT AIR BALLOON**

Serial Numbers
EX65-238 and up

THIS PAGE INTENTIONALLY BLANK

**CASA Approved
Hot Air Balloon
Flight Manual**

Balloon Serial Number

Registration Mark

Approved By



Eugene Holzappel, Manager
Certification Standards Branch
Civil Aviation Safety Authority
Australia

Approval Date 18 Feb 2003.....

THIS PAGE INTENTIONALLY BLANK

0.1 General Amendment Record

Aircraft Registration:

Aircraft Serial Number:

Incorporation Date	Description of Amendment	Incorporated By

0.2 Log of effective pages**REVISION 0: September, 2002****FROM SERIAL NO. EX65-338****THIS PAGE INTENTIONALLY BLANK**

Page	Revision	Page	Revision
0 - 1	0	4 - 8	Blank 0
0 - 2	Blank 0	5 - 1	0
0 - 3	0	5 - 2	0
0 - 4	Blank 0	6 - 1	0
0 - 5	0	6 - 2	0
0 - 6	0	7 - 1	0
0 - 7	0	7 - 2	0
0 - 8	Blank 0	7 - 3	0
1 - 1	0	7 - 4	0
1 - 2	0	7 - 5	0
2 - 1	0	7 - 6	0
2 - 2	0	7 - 7	0
2 - 3	0	7 - 8	0
2 - 4	0	7 - 9	0
3 - 1	0	7 - 10	Blank 0
3 - 2	0	8 - 1	0
3 - 3	0	8 - 2	0
3 - 4	0	8 - 3	0
4 - 1	0	8 - 4	0
4 - 2	0	8 - 5	0
4 - 3	0	8 - 6	0
4 - 4	0	9 - 1	0
4 - 5	0	9 - 2	Notes 0
4 - 6	0		
4 - 7	0		

APPROVED:  DATE: 18 Feb 2003

For Civil Aviation Safety Authority

0.3 List of Contents

	Page
SECTION 0 - GENERAL	
0.0 Particular Flight Manual Approval	0-1
0.1 General Amendment Record	0-3
0.2 Log of effective pages	0-5
0.3 List of Contents	0-6
SECTION 1 - INTRODUCTION	
1.1 Introduction	1-1
1.2 Definitions	1-2
1.3 Abbreviations	1-2
SECTION 2 - LIMITATIONS	
2.1 Gross Certificated Weight	2-1
2.2 Rate of Climb	2-1
2.3 Envelope Temperature	2-1
2.4 In Flight Venting	2-1
2.5 Final Deflation	2-1
2.6 Flight Crew	2-2
2.7 Number of Occupants	2-2
2.8 Smoking	2-2
2.9 Altitude	2-2
2.10 Wind Speed	2-2
2.11 Mandatory Equipment	2-2
2.12 Allowable Damage	2-3
SECTION 3 - EMERGENCY PROCEDURES	
3.1 Pilot Burner Failure	3-1
3.2 Main Burner Failure	3-2
3.3 Emergency Landing Procedures	3-2
3.4 Fire	3-3
3.5 Avoidance of Low Level Objects	3-3

0.4 List of Contents (Continued)

	Page
SECTION 4 - NORMAL PROCEDURES	
4.1 Pre Flight	4-1
4.2 Flight	4-5
4.3 Landing	4-7
SECTION 5 - PERFORMANCE	
5.1 Calculation of Payload	5-1
5.2 Lift Chart for Kavanagh EX-65	5-2
SECTION 6 - WEIGHT & BALANCE	
6.1 Weights	6-1
6.2 Fuel Tank Weights	6-2
SECTION 7 - SYSTEM DESCRIPTION	
7.1 Envelope	7-1
7.2 Basket	7-5
7.3 Burner System	7-5
7.4 Fuel Tanks	7-7
7.5 Fuel	7-8
7.6 Instrumentation	7-8
7.7 Radio Systems	7-9
SECTION 8 - SERVICING	
8.1 Nature Of Propane.	8-1
8.2 Refuelling	8-2
8.3 Water Contamination.	8-4
8.4 Fuel Tank Nitrogen Pressurization.	8-4
SECTION 9 - SUPPLEMENTS	
	9-1

empty very quickly and could cause damage or injuries if this limitation is ignored.

2.6 Flight Crew

The minimum number of flight crew is one person. However, there must be sufficient weight on board so the balloon can be flown in a controlled manner.

2.7 Number of Occupants

The maximum number of basket occupants is three including the pilot.

2.8 Smoking

Smoking is not allowed while the balloon is being prepared for, or during flight. A placard bearing the statement "NO SMOKING" must be displayed on the inside of the basket.

2.9 Altitude

Maximum permissible operating altitude is that height above ground level at which the burner fails to maintain ignition or that height, at which the maximum temperature is reached, whichever happens first. For flights above 10,000ft, oxygen must be used in accordance with Civil Aviation Regulations, or as prescribed by the Civil Aviation Authority of the country of operation.

2.10 Wind Speed

The balloon must not be launched in winds exceeding 15 knots at ground level, and must not be flown if there is extensive thermic activity.

2.11 Mandatory Equipment

The following equipment is mandatory and must be carried in the basket each time the balloon is flown.

- a. A serviceable instrument pack, including an altimeter, vertical speed indicator, envelope and/or ambient temperature gauge. If the envelope temperature gauge is not working, or

SECTION 1 - INTRODUCTION

1.1 Introduction

This Flight Manual applies only to the particular balloon identified by registration marking and serial number on Page 0-1 and contains the airworthiness limitations and essential data for the balloon. Special operations requiring additional limitations and instructions are listed in "Section 9 - Supplements" and that section shall be consulted before undertaking any such operations. For operating information not included in this Manual, reference should be made to the appropriate Operations or Manufacturer's Manuals.

The Flight Manual shall be carried in the balloon on all flights. It is the responsibility of the pilot in command to be familiar with the contents of this Manual and to comply with all directions contained herein relating to the operation of the balloon.

Approved amendments will be issued when necessary and will take the form of replacement pages, with changes to the text indicated by a vertical line in the margin together with the amendment date at the bottom of the page. It is the owner's responsibility to incorporate in this manual all such amendments, and to enter the date of incorporation and his/her signature on the appropriate Amendment Record Sheet.

The balloon has been certificated on the basis of the equipment fitted at the time of certification. Any changes in equipment are subject to approval by the Civil Aviation Safety Authority, or the equivalent Civil Aviation Authority in the country of operation. No entries or endorsements may be made in this Flight Manual except in the manner and by persons authorised for the purpose by the Civil Aviation Safety Authority.

1.2 Definitions

WARNING Operating procedures, techniques, etc., which could result in personal injury or loss of life if not carefully followed.

CAUTION Operating procedures, techniques, etc., which could result in damage to equipment if not carefully followed.

NOTE An operating procedure, technique etc., which is considered essential to emphasize.

AIRFIELD PRESSURE HEIGHT

The Airfield Pressure Height is that height registered at the surface of an aerodrome by an altimeter with the pressure sub-scale to 1013.2 hectopascals (millibars).

APPROVED Pertaining to materials, aircraft parts, or data including all parts, materials, and data, which are approved by Kavanagh Balloons and/or C.A.S.A.

1.3 Abbreviations

L.P.G. Liquefied Petroleum Gas.

C.A.O. Civil Aviation Order.

C.A.S.A. Civil Aviation Safety Authority.

F.P.M. Feet per minute.

A.G.L. Above ground level.

A.M.S.L. Above mean sea level.

SECTION 2 - LIMITATIONS

2.1 Gross Certificated Weight

Maximum gross certificated weight: 638 kg. This is the maximum permissible operating weight without regard to ambient conditions. The maximum operating weight for any intended flight, however, must be determined from the performance section, (Section 5).

2.2 Rate of Climb

Maximum allowable rate of climb is 1500fpm.

CAUTION: If there is damage to the envelope, which is within the acceptable limits shown in 2.12 of this section, the maximum climb rate must be reduced to 750 fpm.

2.3 Envelope Temperature

Maximum continuous envelope temperature is 120 degrees Celsius.

2.4 In Flight Venting

During flight, the Lite Vent may be used for venting air at the pilot's discretion, however care must be taken to ensure the balloon does not deflate to the point where the mouth is beginning to close.

WARNING: If envelope distortion is apparent, venting should be stopped and the envelope allowed to re-inflate. If the distortion persists, the balloon should be stabilised by using the burner in short bursts until the vertical speed decreases and the balloon is again fully inflated.

2.5 Final Deflation

The Lite Vent deflation system, may be partially opened during approach to landing at the pilot's discretion.

WARNING: The Lite Vent may be fully opened only when the balloon is within 6 feet of ground level as the balloon will

3.2 Main Burner Failure

a. In the event of a main burner failure, several options are available to the pilot. If the burner is a double, and one burner fails, continue the flight using the other burner and land as soon as possible. If both main burners malfunction, (or if only a single is fitted), use Liquid Fire. If the Liquid Fire fails to function, check that the tanks connected to the burner are not empty, and make sure that they are properly connected and turned on. If there is still no fuel flow, try another tank. If the fault cannot be rectified, prepare for a heavy landing. Follow the emergency landing procedure.

b. Under some conditions generally associated with low ambient air densities, (hot weather), a flame instability may develop after several seconds of continuous burner operation. This will first be noticed by a change in tone of the burner flame to a "whoosh" noise. If burning is continued, the flame may be extinguished completely, however this can generally be avoided by terminating the burn at the initial change of sound, leaving the blast valve closed for a moment, and then burning again. Further occurrence of this phenomenon can be avoided by using shorter burn periods.

3.3 Emergency Landing Procedures

Unpremeditated Fast Descents - To arrest a fast descent, all available burners, including Liquid Fire, can be used simultaneously and may, if necessary, be used continuously until the maximum envelope temperature is reached. During extreme circumstances, this course of action can be repeated, as the temperature may stabilize and show a lower reading after a short pause between burns. If the descent cannot be slowed to an acceptable rate before ground contact is made, prepare for an emergency landing.

if the instrument pack does not contain one, an acceptable alternative is a 120°C fusible link warning device in the envelope, provided that an ambient temperature indicator is carried as well.

b. One approved fire extinguisher and handling line.

c. One master tank and one slave tank must be carried as minimum fuel requirement on each flight. If a double burner is fitted, two master tanks must be carried as minimum fuel requirement on each flight. If burners not requiring vapour supply are fitted, the minimum fuel requirement is two slave tanks.

d. This flight manual must be carried in the basket on each flight.

e. Matches or a hand held igniter must be carried in the basket as a secondary means of pilot burner ignition.

2.12 Allowable Damage

Allowable fabric damage (Tears, holes etc.) A maximum of three holes or tears is permitted up to and including the sizes shown below in each case.

For balloons with less than 300 flight hours and less than 3 years old, and no evidence of overheating, (as shown by original tell tale):

25mm-above the top of panel 8.

50mm-below the top of panel 8, down to the top of panel 5.

500mm-below the top of panel 5 down to top edge of panel 3.

All others:

10mm-above the top of panel 8.

25mm-below the top of panel 8, down to the top of panel 5.

250mm-below the top of panel 5 down to top edge of panel 3.

Use of a scoop is optional, and the balloon may be flown with a damaged scoop. The balloon may be flown with burn damage to the lowest three panels, provided there is no unacceptable damage to the load tapes.

Any damage to load tapes which exceeds 10% of the cross sectional area renders the envelope unairworthy. In this case the balloon must not be flown until approved repairs are made.

All major repairs must be carried out to approved data, which is contained in the Maintenance Manual or may be available from the manufacturer. The Maintenance Manual for this balloon contains a definition of major repairs.

SECTION 3 - EMERGENCY PROCEDURES

3.1 Pilot Burner Failure


In the event of pilot burner failure, adopt the following course of action:

- a. Check that the vapour valve on the master tank is open and that the vapour shut-off valve at the base of the burner is open.
- b. Check that the pilot burner hose is connected correctly to the regulator on the master tank and that the regulator is not on too low a setting, and then attempt to relight the pilot burner.

If unsuccessful, continue the flight using the other burner, (if fitted), and make a landing as soon as possible. If there is a complete failure of the pilot light system, and the fault cannot be rectified, proceed as follows:

- c. Partially open a Liquid Fire valve and ignite the fuel coming directly out of the jet. Adjust the valve to give a flame which will act as a temporary pilot burner. Continue the flight, using the main blast valve and make a landing as soon as possible.
- d. If for some reason it is not possible to use a Liquid Fire flame as an emergency pilot, the main blast valve can be left open and the fuel flow controlled from a tank valve. During use, the fuel supply will have to be throttled back by almost turning off the tank valve, but leaving a small flow to ensure the fire doesn't extinguish. This reduced flow will cause refrigeration of the tank valve, so a close watch should be kept on this so the valve doesn't become permanently iced up and inoperative. It is best to use the valve frequently in short, full power burns to limit the icing. Land as soon as possible.

on the burner frame. The burner frame should be lined up with the burner valve handles pointing towards a low side of the basket. The basket suspension cable at each corner of the frame can now be attached by placing the cable end on one side of the burner frame corner bracket and sliding the karabiner through the wire thimble and the bracket. If there are two cables per corner, they are fitted one to each side of the bracket. These methods are shown on the diagrams below.

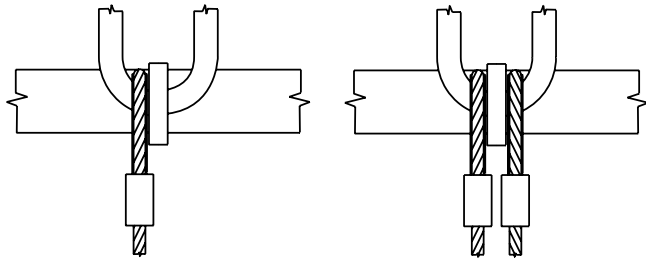

Step 2 – strap the fuel tanks into the basket, taking care to orient the master tank to be used for inflation so that the float gauge face will be in the correct and readable position when the basket is laid on its side, i.e. the Zero reading will be nearest the ground. This will ensure a liquid supply to the burner and vapour to the pilot light.

CAUTION: If a separate (extra) tank is used for inflation, it must be secured to the basket, so unexpected movement of the basket prior to lift off will not adversely affect the fuel supply from this tank.

Step 3 - fit the padded flex-frame pole covers, ensuring the pilot hose(s) are inside the covers. The liquid hoses may be fitted inside the covers provided there is enough length to reach both tanks on the same side of the basket. Otherwise straps on the pole covers are used to secure the liquid hoses to the outside.

Step 4 - it is important to ensure that there are no leaks in the fuel system before the pilot burners are lit. Fit the

Emergency Landing - Passengers should be instructed to brace themselves with knees slightly bent, and hold onto one or more of the internal basket handles. The pilot should have the fuel system turned off at the tanks before ground contact is made and alert passengers to imminent ground contact. Immediately prior to touch down, any emergency ballast can be removed from the basket, if this can be done without injuring persons on the ground. Before ground contact is made passengers should be reminded not to leave the basket until instructed to do so.

3.4 Fire

On the ground - Turn off fuel at the main tank valves, use the fire extinguisher to put out fire. If this action proves unsuccessful after 30 seconds or so, evacuate everyone from the immediate area, as there is danger of fuel spraying out of relief valves and a possibility of explosion from overheated fuel tanks.

In the air - Turn off fuel at main tank valves. Put out the fire with the fire extinguisher. If it is safe to relight the pilot burner, proceed as normal and make a landing as soon as possible. If it is unsafe to relight the pilot burner, prepare to make an emergency landing.

3.5 Avoidance of Low Level Objects

If there is a possibility of a collision with an object on the ground, the pilot must be quick to make the decision whether it is better to climb or descend.

Climb - The situation must be assessed quickly, and if the decision to climb is made it must be made only if the pilot is certain that the obstacle can be cleared.

NOTE: from stable flight the balloon responds faster when a descent is initiated than when a climb is started.

Descent - If the decision to descend is made, brief the passengers and carry out an emergency landing using the Lite Vent to increase the rate of descent if necessary. During the descent shut-off fuel as described in emergency landing procedures.

Powerlines - If contact with power lines is unavoidable, descend as fast as possible so that the contact is made with the envelope and not with the basket assembly.

SECTION 4 - NORMAL PROCEDURES

4.1 Pre Flight

a. Weather - If mandatory, or at the pilot's discretion, obtain a meteorological forecast for the flight area. This can be checked locally before the flight by release of a helium filled pilot balloon and observation.

b. Fuel - A fuel quantity check shall be made immediately prior to flight to ensure leakage has not occurred since refuelling. Check that the fuel quantity is adequate for the planned flight. There are two ways to check fuel:

i. The fixed liquid level gauge or bleeder valve has a dip tube which is long enough to allow liquid to discharge from the valve when the tank is 80% full or over. When filling tanks this level should not be exceeded.

ii. Weighing is the most accurate way of measuring fuel quantity when the level is higher than that shown on the fuel gauge and lower than 80%. LPG weighs 0.5kg per litre at 16 degrees Celsius so a simple calculation is necessary to determine quantity after the tank is weighed. See Section 6.2 for tank weights.

c. Site Selection - If the surface wind is above five knots a sheltered site should be considered for inflation. Any site selected for take off should be assessed to ensure clearance of down-wind obstructions during the initial climb out phase.

d. Assembly

Step 1 - locate the basket so that when it is laid over for inflation, the burner will be pointing downwind. Slot the four nylon flex-frame poles into the sockets in the top edge of the basket and then mount the burner on the poles via the sockets

There are two control lines for the Lite Vent. One is coloured white and this is used to extend the panel to its full diameter to allow for a complete seal. The second line is red & white flecked and this is used for in flight venting as well as final deflation. Under normal conditions the vent will reseal by air pressure and from the action of the counter weight at the base of the reset shroud lines. However the white reset line is there to assist if necessary.

Prolonged opening of the vent will cause partial deflation of the envelope and this will be seen by inward movement of the lower part of the envelope. Attention is drawn to SECTION 2 - Limitations Para. 2.4

If extreme turbulence is encountered during flight the vent panel may be securely held in place to prevent leakage, by application of a little force to the white reset rope.

b. Rotation Vents - may be used in flight to orient the balloon as the pilot wishes.

NOTE: Excessive use of the rotation vents will cause a significant rise in fuel consumption.

c. Fuel Management - Each pilot shall have a fuel management system that works. The only suggested procedure is to ensure there is an adequate fuel supply available to all fuel supply hoses at all times during flight, so if an emergency need for maximum power arises, there will be fuel available in sufficient quantity to meet the need.

d. Burner - The burner will be most effective if used in short burns at short intervals for greater control of vertical movement. A point to remember is that better fuel consumption will be obtained if vertical speed is kept to a minimum.

main supply hoses to the liquid outlet valves and pressurize the system. If no leaks are apparent the pilot system can be connected and lit using the piezo igniter. A short burner test using each burner and fuel from each tank to be carried in flight is recommended to ensure a liquid supply from all tanks. This test may be carried out at any time prior to lift off. The fuel tank valves are now shut off for the initial stages of the inflation.

Step 5 - the basket should be laid on the side with the burner pointing downwind. If a inflation safety restraint, (quick release tie off), is to be used, it must now be fitted before the envelope is removed from the bag.

The envelope bag is placed downwind of the burner and the bottom portion of the envelope is removed from the bag. Total removal of the envelope from the bag is not recommended until after the connection to the basket is made, otherwise a wind gust could partially inflate the balloon and cause it to blow away. The envelope cables are connected to the karabiners in four groups, ie. when facing downwind, fit 1 -5 to the top left corner of the burner frame, then 6-10 to the top right corner. The same system of numbering continues for the rest of the rigging. These numbers are marked on the rigging cover at the top of each cable. Connecting the rigging to the burner frame in this order and position ensures the scoop is on the underside during inflation. Make sure that all the karabiner screwgates are in the closed position.

Step 6 - Set the altimeter for correct QNH or QFE setting and check the electric variometer and temperature gauge for indication of correct operation, ensuring the cable connection to the envelope, (if applicable) is secure.

Step 7 - Connect the two Lite Vent control lines to the basket at the appropriate places. These are coloured red & white fleck for the vent/deflation rope, and white for the reset rope. Connect the rotation vent cords at the same time.

e. Pre-Inflation Checks - Check that at least one extra source of ignition for the pilot burner is in the basket, ie. striker or

matches or both. Check that all equipment such as handling line and fire extinguisher is on board as well as any other equipment to be carried. Make a detailed check of the load to be carried against the instructions set out in SECTION 5.

f. Inflation - Recommended Procedure - One crew member shall be appointed to the crown line and at least one other to the mouth of the balloon to begin inflation with the fan. The vent lines are connected to the basket and the fan is started. At this point the balloon pilot may walk into the balloon taking all the excess of the two vent ropes to above the lower pulley.

As the balloon inflates the pilot shall visually inspect the condition of the envelope both inside and outside and ensure that the vent ropes and the rigging are not in a position to tangle as the inflation progresses. Particular attention should be directed to all control lines and associated attachments and fittings.

The crown crew member shall attach at least a few of the top temporary vent tabs on the vent panel during the initial stages of inflation. As the balloon continues to inflate, the reset counter weight will help to hold the panel in place, and this can be assisted by a helper holding some pressure on the white reset rope to secure the panel in place if needed. If all the vent tabs are attached, the inflation is easier, as little or no attention needs to be given to the security of the vent panel.

When the balloon is about half full with cold air, the tank mentioned in Part (d) Step 2. is turned on and the pilot burner is lit.

The pilot at this stage will give several short burns to cause the balloon envelope to lift off the ground a little so that the fan can complete filling. The crown person should only apply enough weight on the crown line at this time to stop the crown from drifting back towards the basket in calm conditions and no weight at all if there is any wind. When the balloon is almost

completely full on its side, the pilot will signal to the crown crew to apply weight on the line, either by burning, switching off the fan, or some other pre arranged method. The crown will rise rapidly if no weight is applied and the task of the crown crew is to let it rise slowly to the upright position.

In calm conditions the crown crew's job is harder than during windy conditions when little pressure on the crown is needed as the wind is quite an effective anchor for the crown.

g. Pre - launch Checks

- i. After the balloon is upright and before take-off, activate the Lite Vent red & white flecked rope to release all of the Velcro tabs around the outer edge of the vent panel. Pull on the white reset rope to ensure the vent panel is fully extended.

Operation of both control lines will ensure the vent system is fully functional. Under normal flying conditions, the reset rope will not be needed again during the flight, and the excess should be stored in a pouch in the basket or in a pouch strapped to a pole cover.


- ii. Ensure that all fuel supply hoses are delivering fuel satisfactorily.
- iii. Ensure that all passengers are properly instructed.
- iv. Make a quick mental check (or use a written checklist), before lift-off to ensure that all points in (a) to (e) of this section have been completed.

4.2 Flight

a. Lite Vent - the Lite Vent is an effective control and should be used with caution until the pilot becomes familiar with its effect on manoeuvring.

5.2 Lift Chart for Kavanagh EX-65

Envelope temperature, 100 Degrees Celsius, I.S.A.conditions

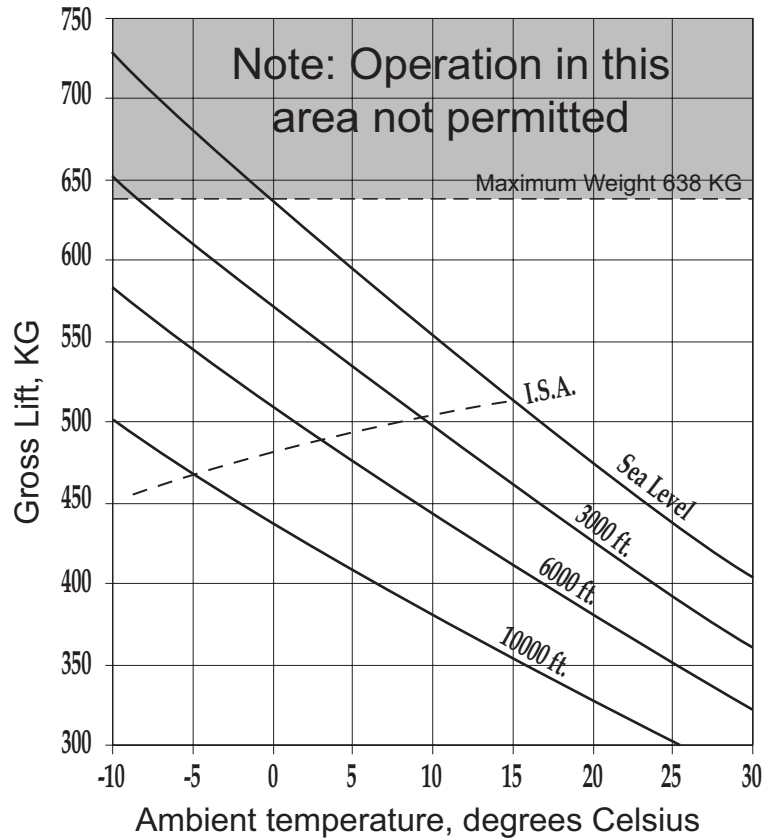

4.3 Landing

a. The rotation vents may be used to orient the basket so that a long side is at a right angle to the direction of travel.

This will ensure the most comfortable position for landing. For a square basket it is the pilots option as to which way is most comfortable.

b. It is recommended that the pilot burner/s and the main burners are off before ground contact is made.

c. The Lite Vent may be fully opened once the balloon is within six feet (2 metres) of ground level at the pilot's discretion during the landing operation. During the final landing, the pilot should maintain weight on the red & white flecked vent rope to ensure the vent panel does not partially cover the hole during the deflation.

d. Once the balloon has stopped and is fully deflated, the pilot shall ensure all the fuel valves are turned off and that fuel pressure is released from all parts of the fuel system.


SECTION 5 - PERFORMANCE

5.1 Calculation of Payload

- a. Find ambient temperature at takeoff site.
- b. Determine the height, (above sea level), of the launch site, and set the altimeter subscale to 1013 millibars. If the altitude shown is greater than the height of the actual take off site, this difference must be added to the planned maximum altitude. If the altimeter shows a lessor height, the difference should be subtracted from the planned maximum altitude. This calculation allows for daily differences in atmospheric pressure.
- c. Decide the maximum planned flight altitude.
- d. Enter the Load Chart graph at the ambient temperature scale and move vertically to the altitude of the launch site
- e. Move diagonally to maximum flight altitude ie. parallel to ISA line.
- f. Move horizontally across to the gross lift scale at the left side.
- g. Read off gross lift from the scale at this point and this figure is the total maximum weight that can be carried at the maximum planned flight altitude.
- h. From the figure determined at 'g.', subtract the weight of the balloon system and fuel as worked out from 6.1 & 6.2 and the remaining figure is the available payload.

THIS PAGE INTENTIONALLY BLANK

The two diagrams following, show the Lite Vent, first in the closed position and second in the open position. The white reset rope is used to extend the panel to its full diameter as needed.

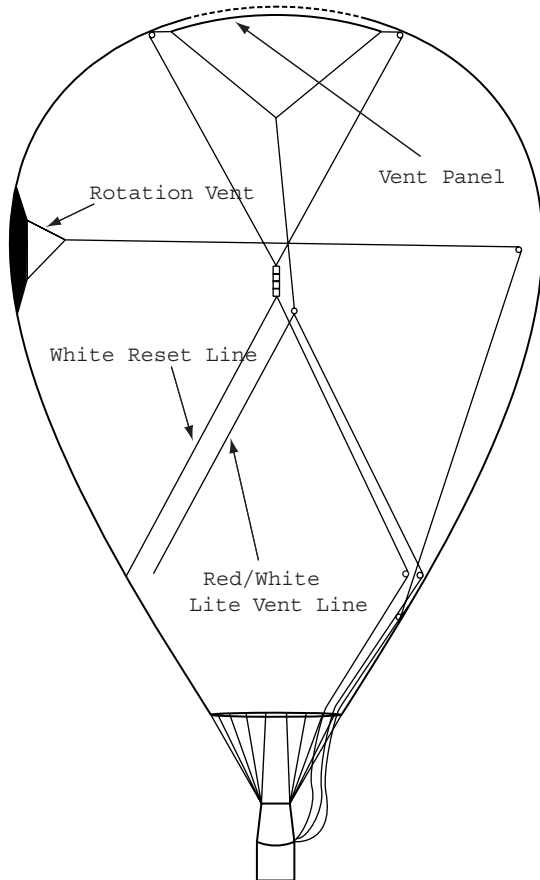

The figure above shows the Lite Vent in the closed position, or as it would be if the reset line has been used to fully extend the panel. For clarity, this diagram shows the vent panel slightly away from the top of the balloon.

SECTION 6 - WEIGHT & BALANCE

6.1 Weights

BASKET WEIGHT, Includes:

Burner, Model:.....S/N:.....

Load Frame Size.....x.....S/N:.....

Basket, double tee.....x.....S/N.....

- Instrument pack
- 4 Flex-Frame poles
- 4 Pole covers
- Tank straps
- Fire Extinguisher
- Handling line
- Floor Padding
- Back Padding
- Side and Front Padding

Sub-Total =

ENVELOPE Includes:

- Envelope
- Scoop
- Sub-Total =

Carry Bag

TOTAL WEIGHT =

Signed:..... Date:.....

Aircraft Weight Control Authority No.....

6.2 Fuel Tank Weights

Tanks with AFL's	Empty Weight	Full Weight
Kavanagh 55, Master	21	43
Kavanagh 55, Slave	20.1	42.1
Kavanagh 76, Master	23.3	53.7
Kavanagh 76, Slave	22.5	52.9
Kavanagh 82, Master	24.6	57.4
Kavanagh 82, Slave	23.7	56.5
Tanks without AFL's	Empty Weight	Full Weight
Kavanagh 55, Master	20.5	42.5
Kavanagh 55, Slave	19.2	41.2
Kavanagh 76, Master	22.9	53.3
Kavanagh 76, Slave	21.6	52
Kavanagh 82, Master	24.2	57
Kavanagh 82, Slave	22.9	55.7
Worthington 47 Master	15.3	34.3
Worthington 47 Slave	14	33

Note: Weights are in Kg, and all tank weights include padded jackets, and handle guards.

SECTION 7 - SYSTEM DESCRIPTION

7.1 Envelope

The EX type envelope is of the "bulge gore" design and is made up of 20 vertical segments (gores), which have a tailored excess of fabric horizontally between each vertical load tape.

The balloon envelope is manufactured from high tenacity rip-stop nylon fabric which is coated so that the whole structure remains as airtight as possible. All the major loads are taken on polyester webbing both horizontally and vertically. These allow for a wide margin of safety as well as providing suitable anchor points for the attachment of payload.

Lite Vent. The two main envelope controls, the manoeuvring vent and deflation device, are incorporated into one system called the Lite Vent. This consists of an oversized circular panel, which sits below a hole in the crown and is held in place by a series of Vectran cords, connected to a counter weight and by internal pressure from the lifting gases. It is opened using a red & white flecked control line, which is connected to the edge of the vent panel via a set of parachute style shroud lines, and fed through a system of pulleys to the basket.

For in flight venting the outer edge of the panel is pulled inwards and down to allow controlled venting of hot air.

For final landing, the same red & white flecked control line, is pulled further downwards by the pilot, allowing a larger opening and full deflation of the balloon. This final landing technique should only be used when the balloon is within six feet of ground level, (refer SECTION 2, LIMITATIONS), as the balloon will empty very quickly and could cause damage and/or injuries if activated at a greater height.

The double burner may be fitted with an interconnecting pipe and isolating valve (called a cross flow valve), so that the one main burner valve may activate either one or two burner units.


The main on/off blast valves are Worcester 44 ball valves, which are fitted to manifold blocks at the base of the burner cans. A pressure gauge is fitted to the upstream or fuel tank side of the main valve and shows the operating pressure of the burner as well as indicating the presence of fuel pressure in the hose.

Ignition of each main burner is achieved by use of a pilot burner. The pilot burner is a separate system from the main burner. It draws from the vapour valve on the master tank, which is fitted with a pressure regulator to reduce the line pressure to approx. 115kpa. The pressure may be varied to suit the pilot by adjusting the knob at the end of the regulator on the tank. By turning the knob clockwise pressure will be increased.

CAUTION: Care should be taken to not operate the pilot burners at too low a pressure, as there may be a danger of accidentally extinguishing the pilot flame.

The pilot burner is a tube and cup arrangement in the bottom of the main burner and is fitted with a piezo electric igniter for ease of operation. On the single burner there is one vapour supply hose and on the double burner there are two vapour supply hoses.

A secondary burner is supplied as a standard feature. This is called "Liquid Fire" and is a system where liquid propane is fed directly into the burner can beside the pilot burner, bypassing the heat exchanger coil. It is operated by a small black handled, ball valve and is only recommended for use in stable flight. Liquid Fire has a low noise level and is intended primarily for over flight of animals.

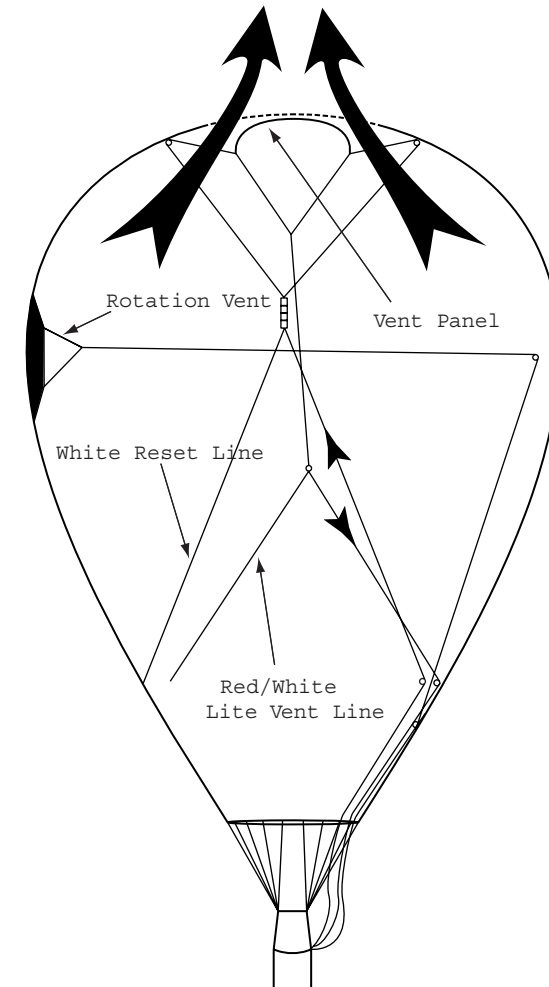

The figure above shows the Lite Vent opened for in flight venting. As the panel is pulled downwards, the outer edge also moves towards the centre, causing a very large vent aperture. During the landing phase, within six feet (2 metres) of ground level, the panel is pulled further down to allow for full and fast deflation.

Intermediate Landing. The red & white flecked rope is used for partial deflation during intermediate landings. This is a very effective vent and will cause a dramatic loss of lift if fully opened. The vent will close automatically from air pressure if the red & white flecked vent rope is released.

Rotation Vents. (see Diagram on page 7-2) These vents allow the pilot to rotate the balloon in either direction and are useful to maintain the orientation of the long side of the basket across the direction of travel during the landing. The ends of the two activation cords are 25mm wide webbing. One is coloured white and the other is black. When facing outwards from the basket, the white strap is to the right and will cause the balloon envelope to rotate towards the right, while the reverse applies to the black coloured strap.

The lowest panel in the balloon next to the envelope mouth is made from Nomex fabric, which has a very high resistance to heat and prevents unnecessary burn damage, which may occur during inflation.

The base of the envelope is connected to the burner frame by stainless steel wires in four groups each terminating at a 3000kg plated steel karabiner.

Scoop Skirt. This is an extension, made from Nomex, of half the base of the balloon, which tapers down at the bottom to about 600mm wide at the burner frame. This skirt acts as a scoop for air entering the envelope and is very efficient for high wind takeoffs, and also for tethered flights.

7.2 Basket

The basket can be 1.0 metres wide and 1.0 - 1.2 metres long. It is constructed of cane woven around upper stainless steel tubular frame and lower cane (or stainless steel tubular) frame. The floor is of waterproof plywood, which is laced to the lower support frame. Bolted to the underside of the floor are three, (or four), hardwood runners, which protect the floor from damage during landing and ground handling. Alternatively, a basket with a woven cane floor may be used instead of the ply floor.

The suspension system consists of stainless steel wire rope slings, which pass under the floor of the basket and connect to each of the four suspension attachment points on the burner load frame. To assist in supporting the load frame and burner during inflation and landing, there are four nylon flex frame support poles which fit into stainless steel sockets on both the burner load frame and the top edge of the basket.

The bottom edges of the basket are covered with tough chrome hide to prevent scuffing the wickerwork and the edge of the floor. The top edges of the basket are covered with cushioned leather for passenger comfort.

It is standard for the basket to have a fire extinguisher and handling line fitted.

7.3 Burner System

The Series 3 burner unit consists of one or two single barrel natural draught, high-pressure, propane burners. These are mounted on a tubular frame and are gimballed to allow the burners to swivel during use. There is a friction control which will allow movement when desired, but should be adjusted so the burner will not tilt when unattended.

THIS PAGE INTENTIONALLY BLANK

When operating Liquid Fire, the valve should be opened slowly to ensure ignition of the fuel before it is opened fully. This secondary burner should only be used when there is a real need such as close proximity of stock, as it will produce an amount of carbon powder which will cause discolouration of the balloon fabric.

7.4 Fuel Tanks

Fuel tanks are Mytton 55litre stainless steel, Kavanagh STPV 55litre, 76 litre, and 82litre stainless steel, or Worthington 44 litre, aluminium propane tanks. Two master tanks (if double burner fitted) are the minimum required for flight. If a single burner is fitted, the minimum is one master and one slave tank. Extra slave tanks may be carried as flight requirements dictate. All tanks are supplied with a liquid outlet valve (slave type) and some also have a vapour outlet valve with a pressure regulator for the pilot burner system (master type).

All tanks have a safety relief valve and a fuel quantity gauge which shows decreasing fuel quantity from 32% down as well as a fixed liquid level gauge. This is a bleed screw which, when opened, will vent liquid from the tank if the level is over 80%, the safe level for a full tank. Some tanks may be fitted with an automatic fill limiter. See Section 8 - Servicing.

Liquid capacity of each tank is:

Tank type	Capacity (litres)	Usable (litres)
Kavanagh 55	44	43
Kavanagh 76	61	59.5
Kavanagh 82	66	64.6
Worthington 47	38	37

7.5 Fuel

Any commercially available propane is suitable. This includes propane/butane mixtures commonly used to fuel automotive vehicles, with the proviso that the fuel pressure shown at the pre-flight burner test when using such a mixture is not below 350kpa.

7.6 Instrumentation

Several types of instrument pack may be used. These are shown below.

The Ball 655 balloon pack has an 0-20,000ft. digital altimeter, a two scale electric variometer and an envelope and ambient temperature indicator. This pack is fitted in a padded bag with Velcro ties.

The Ball 659 balloon pack is the same as the 655 except there is no ambient or envelope temperature gauge fitted. This pack must be used with a separate ambient thermometer.

The Ball M55 balloon pack is a new model and replaces the 655 pack. It has updated electronics and stores elapsed flight time and peak envelope temperature.

Flytec 3040 balloon pack has a digital altimeter, variometer and remote envelope temperature sender. Mounting is by bracket or Velcro straps. Flytec 4005 and 4010 are similar to the 3040 except there is no envelope temperature sensor fitted.

Brauniger AV-Classic and IQ Classic both feature a digital altimeter and variometer. Mounting is by bracket or Velcro straps. Brauniger AV-Competition and Competition IQ, both have the same features as the Classic, but also have an inbuilt barograph.

An additional feature found on the Competition IQ GPS, is a socket for connection of a GPS, the data from which is stored alongside the barograph data. This gives a complete picture of each flight, showing time, altitude and position.

Aircotec Piccolo Plus is a digital altimeter and variometer. Mounting is by Velcro strap.

Aircotec Piccolo Plus ACT5000 is the same as the Piccolo Plus, but has an infra red envelope temperature sensor as well as the standard features.

If an envelope temperature sensor is not fitted, a 120⁰ Celsius melting link warning device must be used.

7.7 Radio Systems

No radio system is fitted as standard, however approved handheld VHF radios may be used from time to time as the flight requirements dictate.

Citizen band radios may also be used for communication with ground chase crews, as the need arises. These must be used in accordance with government regulations in force in the area the balloon is flown.

8.3 Water Contamination.

If water contamination is suspected, a couple of teaspoons of Methyl Alcohol, (Methylated Spirits), should be added to each tank. The simplest method is to pour the Methyl Alcohol into the filler hose before connecting to the tank. The procedure used to put this method into practise will vary with the type of fittings used.

This is more important for Master tanks, which have a vapour outlet for the pilot burner. This action will prevent a build up of ice at the pilot burner jet, and which may in some cases cause total blockage of the jet.

8.4 Fuel Tank Nitrogen Pressurization.

The burner has an operating pressure range of 350-1000Kpa, (50-145 PSI). Flying a hot air balloon with the fuel pressure below 450KPA requires care due to the reduced burner power output. In order to provide increased fuel pressure during cold weather, fuel tanks may be pressurized with nitrogen.

The nitrogen used must be from a regulated supply, capable of providing a pressure of between 0-1000KPA, (0-145PSI) to the fuel tank.

Nitrogen is added to the tank through the liquid feed valve on the tank until the desired pressure level is reached.

Sufficient master tanks must remain nitrogen free and be easily identifiable for vapour pilot light operation.

NOTE: The maximum fuel tank pressure must not exceed 1000KPA, (145PSI).

NOTE: The maximum fuel tank pressure must not exceed 700KPA, (100PSI), if the tank is to be stored in a pressurized state.

SECTION 8 – SERVICING

This section contains information on recommended procedures for refuelling and storage of the fuel system.

8.1 Nature Of Propane.

Propane remains in liquid form only when contained under high pressure or at extremely low temperatures. Propane droplets vapourize very quickly at room temperature and this causes an extreme cooling effect. Severe freeze burns can occur from contact with liquid propane which boils at -43° Celsius.

Propane in its gaseous state is approximately 1.5 times heavier than air. Propane gas will therefore collect at the lowest unventilated point. It is acceptable to refuel tanks in a wicker basket, because the open wicker provides adequate ventilation for gas to escape. If the basket has a plywood floor there are drain holes to allow any build up of gas to escape. It is important to ensure these holes are never blocked.

The following table may be used as a guide for vapour pressure of different LPG types at varying ambient temperatures.

NOTE: The temperatures shown in the table are not ambient air temperatures, they relate to the temperature of the liquid contained in the tank.

Temp. °C	Pressure Kpa		
	Propane	Butane	50/50 mix
0	380	0	210
5	460	20	270
10	550	40	330
15	660	70	400
20	770	110	480
25	880	150	560
30	1010	190	650

8.2 Refuelling

Although fuel tanks are normally filled at approved filling stations, it is common at balloon meets for the refuelling to be done by the balloonist. Therefore it is important to be familiar with refuelling procedures.

There are two different procedures which may be used, depending on whether or not the tanks are fitted with automatic fill limiters.

Filling Tanks without Fill Limiters

- a. Before refuelling, an inspection should be made to ensure there is no damage or wear to the fuel system which could be a safety hazard.
- b. Ensure there are no ignition sources present. e.g. open flames, running engines, lit cigarettes, mobile phones, radios etc. Wear suitable protective clothing, (long sleeve cotton shirt and leather gloves), and have two fire extinguishers on hand. Do not wear synthetic clothing unless it is made from Nomex.

All cylinders to be filled should be electrically earthed during refuelling, or during venting of vapour for any reason.

- c. Connect the end of the filler hose to the liquid outlet, (1 1/4" Acme thread safety connector), and open the liquid outlet valve, as well as the fixed liquid level gauge.
- d. If a pump is being used, the fixed liquid level gauge should only to be turned on a little. If the filling method is by decanting without a pump, there needs to be a higher flow from the fixed liquid level gauge so the pressure in the tank to be filled remains below that of the supply tank.
- e. The fixed liquid level indicator has a dip tube inside the tank, the bottom of which is at the level of 80% of the total volume of the tank. When this level is reached during filling,

liquid will spurt out, giving a visual indication that the tank is full. The fuel flow, tank outlet valve and the fixed liquid level indicator valve should be immediately shut off.

- f. Never allow a fuel tank to be filled above its normal liquid level as indicated by the fixed liquid level indicator. This could allow expansion from an ambient temperature rise to fill the tank completely and cause the unexpected release of propane from the pressure relief valve.
- g. Pressure between the tank outlet valve and the 1 1/4" self sealing coupling on the tank should be released immediately after the filler hose is removed from the tank.

Filling Tanks Fitted with Fill Limiters

- a: Follow the steps set down in parts a, b, & c of the preceding instructions.
- b: Tanks with a fill limiter fitted must be pump filled for the fill limiter to operate. The fill limiter has a 1 3/4" Acme thread, which is the same as the bowser end of an automotive pump at a service station.
- c: The pump hose is screwed directly onto the fill limiter. The time spent refuelling is greatly diminished when filling through this fitting. When the fuel level reaches 80%, the flow is automatically shut off and the pump hose may be immediately unscrewed and switched to the next tank.
- d: The bleed screw on the fixed liquid level indicator is not to be opened when filling through a fill limiter.

NOTE: Notwithstanding the advice given in this section, you are reminded it is the pilot's responsibility to ensure compliance with any laws governing the refuelling of LPG containers.

NOTES:

CAUTION: A fuel tank that has been pressurized with nitrogen becomes unusable for vapour withdrawal for supply to pilot burners, as the nitrogen occupies the vapour space at the top of the tank.

NOTE: It is recommended that any fuel tank which has been pressurized with nitrogen is labelled as such, and that extra care is taken with the use and storage of the tank.

When fuel tanks, which have been pressurized with nitrogen are warmed, the fuel pressure will rise much more rapidly than that of an unpressurized tank. Care must be taken to ensure the maximum safe working tank pressure is never exceeded. This may be achieved by ensuring that tanks to be stored are not pressurized to a pressure greater than 700KPA, (100PSI).

NOTE: It is not a good practise to pump fill a tank through the fill limiter while the tank is pressurized with nitrogen. There is a danger that the pressure in the tank could build even higher as the tank fills and cause the pressure relief valve to activate.

Before refuelling a tank which has been pressurized, The nitrogen content must be expelled by opening the fixed liquid level gauge and bleeding off vapour for several minutes. This will reduce the vapour pressure of the tank to normal and alleviate any problems which may be caused by high pressure during the filling process. Care must be taken to ensure this is done in a suitable safe location.

If tanks to be stored are pressurized to a pressure higher than 700KPA, the pressure must be reduced, and this may be done by opening the fixed liquid level gauge, (bleed valve), and allowing vapour to escape until the tank pressure is reduced to a suitable level. Care must be taken to ensure this is done in a suitable safe location.

This venting procedure may take ten minutes or so to reduce the pressure back to normal tank pressure. When using this procedure, the same precautions must be taken as when refuelling the tanks.

If a master tank is to be returned to use as a vapour supply for pilot burners after having been pressurized with nitrogen, it should be vented as described above then emptied and refilled with the fixed liquid level gauge (bleed valve) open during filling.

Extra care should be taken when this tank is first used to ensure the pilot burner operates correctly and provides a stable flame.

It is important that the use of high pressure nitrogen cylinders is carried out with reference to the safety, handling and storage guidelines in place for these cylinders.

Local and national regulations concerning the use of these cylinders must be complied with. The supplier of the nitrogen cylinders will be able to supply the necessary information.

SECTION 9 - SUPPLEMENTS